


ASSEMBLY INSTRUCTIONS

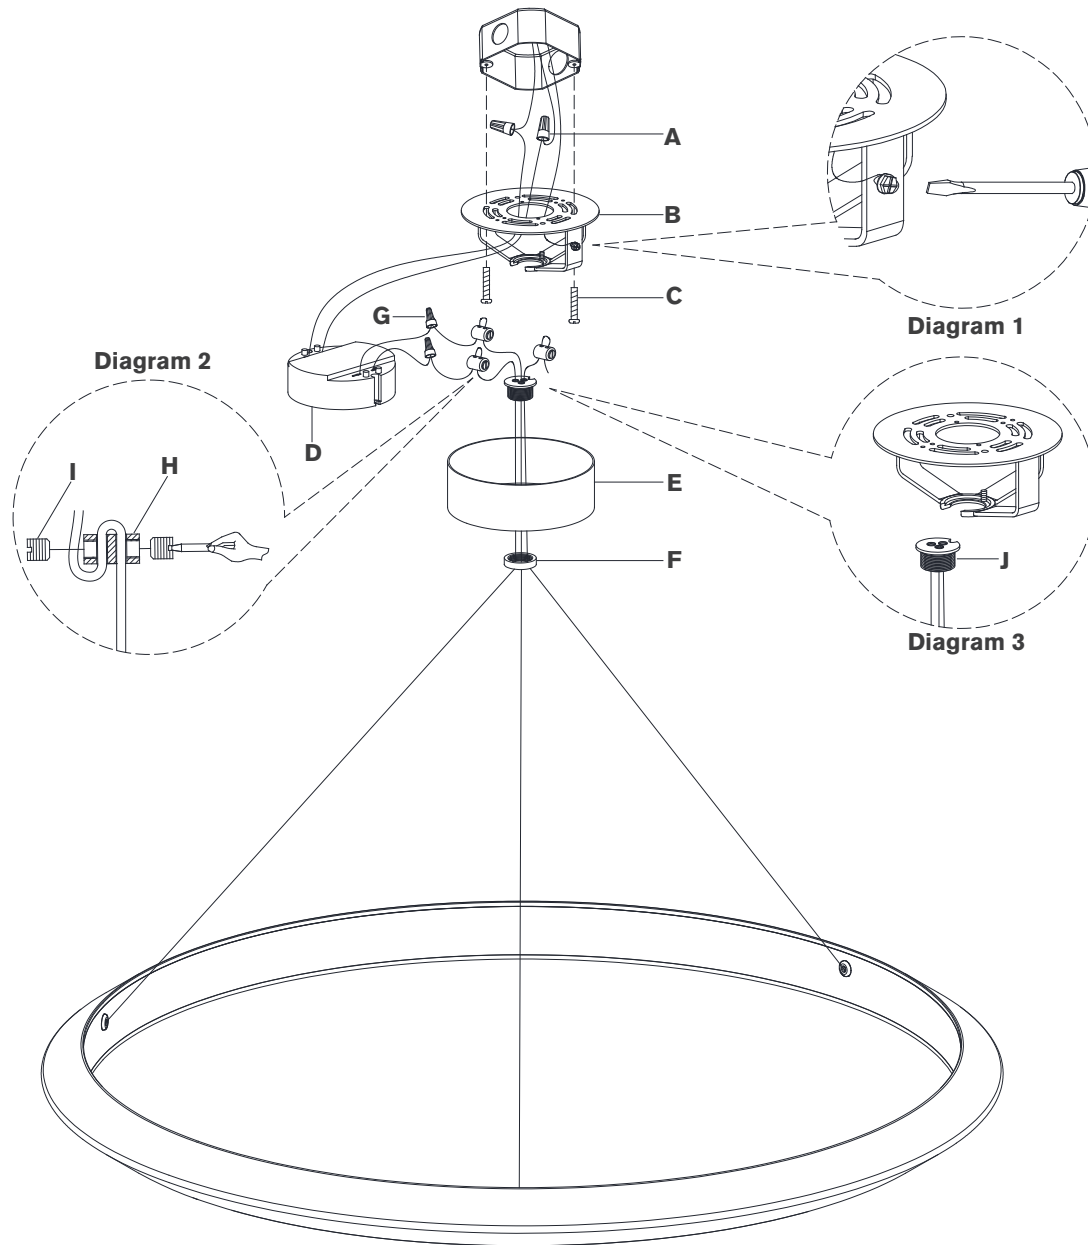

Encircle 48" Ring Chandelier

Item # PB 5152

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver


Wire Cutters

Wire Strippers

Measuring Tape

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (B) from canopy (E) by removing collar ring (F).
3. Remove collar loop (J) from mounting plate bracket.
4. Install mounting plate (B) to the junction box and secure with mounting screws (C).
5. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
NOTE: It is imperative that the fixture is grounded.
6. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
7. Feed hanging cables through collar ring (F) and canopy (E).
8. Route three hanging cables through holes on collar loop (J). Loosen set screw (I) on cable lock (H) and install to end of hanging cables. Insert other end of cables through the cable lock and adjust to desired length. Once complete re-secure set screw (I). Repeat steps with the remaining wires (see diagram 2).
9. After fixture height is achieved shorten wires by using a pair of cutters, leaving enough wire to connect to driver (D).
NOTE: Final leveling in later step will only allow for small adjustments. Make sure fixture height and fixture level are accurate before cutting wires.

ASSEMBLY INSTRUCTIONS

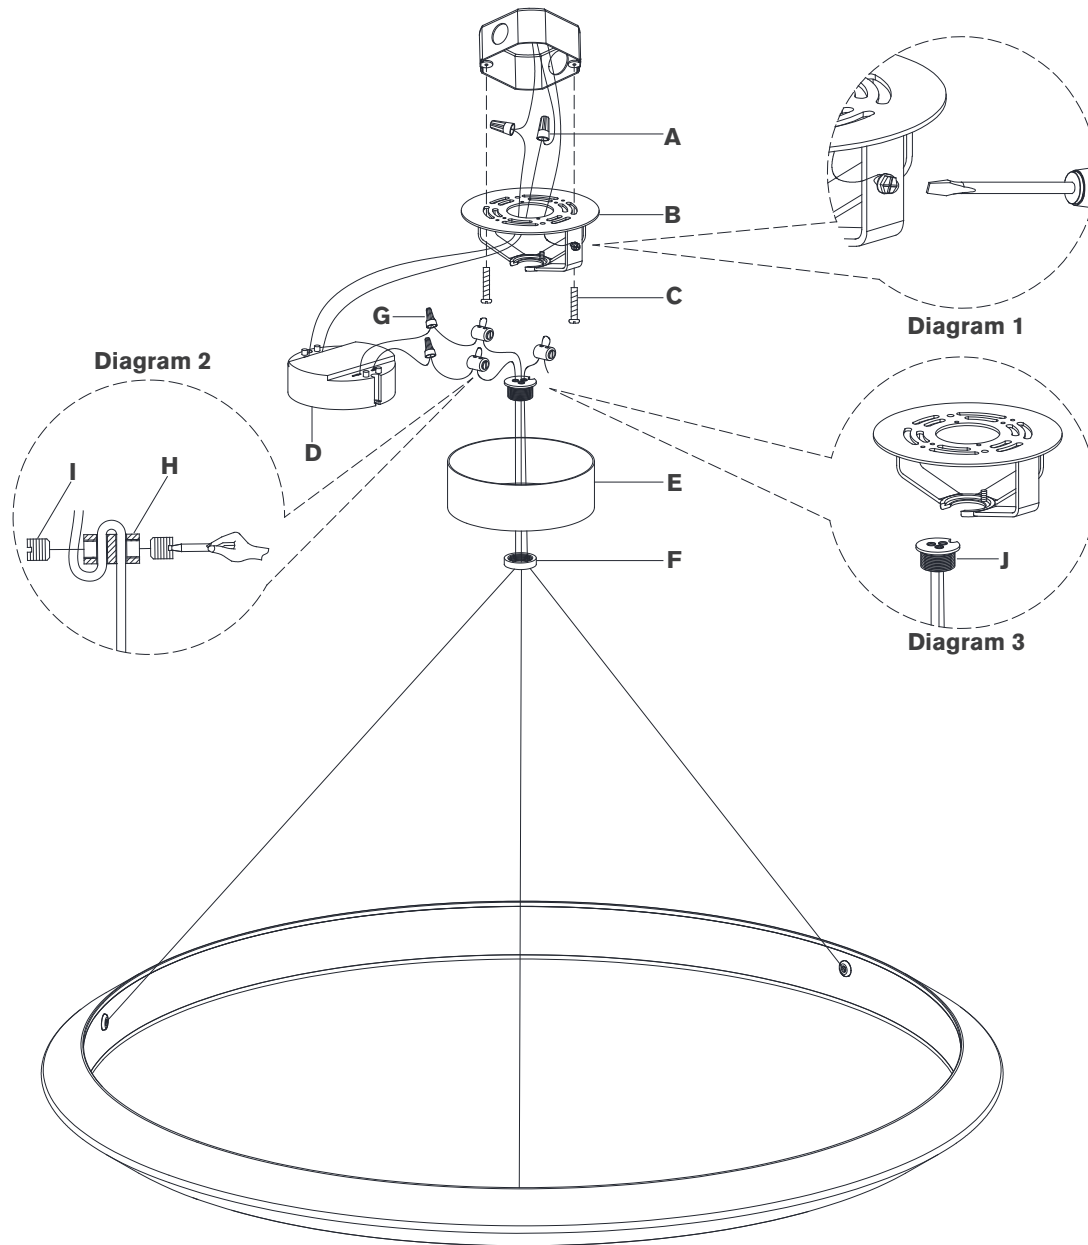

Encircle 48" Ring Chandelier

Item # PB 5152

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Separate wires (marked "+" & "-") and strip insulation on each 5/8".
 11. Hang collar loop (J) with fixture to mounting plate (B) (see diagram 3).
 12. Connect driver (D) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
 13. Connect driver (D) input hot wire (black) to the supply hot wire (usually black) using wire nut (A).
- CAUTION:** Do not reverse the hot and neutral connections.
14. Connect fixture neutral wire (marked "-") to driver (D) output wire (black) using wire nut (G).
 15. Connect fixture hot wire (marked "+") to driver (D) output wire (red) using wire nut (G).
- CAUTION:** Do not reverse the hot and neutral connections.
16. Make sure all wire connections are tight, then carefully tuck into the junction box.
 17. Insert driver (D) into mounting plate bracket.
 18. Install canopy (E) to mounting plate (B) by secure collar ring (F) to collar loop (J).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.